



Optical Power Meter

BOU350T/C

- ◆ FC, SC, ST adapters and 2.5mm UPP
- ◆ Energy save mode
- ◆ Built in VFL (optional)
- ◆ Reference value storage
- ◆ Power autonomy of 100 hours
- ◆ 850/1300/1310/1490/1550/1625nm
- ◆ One-year warranty and Three-year recommended calibration interval



Standard



Carrying bag



Manual



Calibration certificate



Packing box

Optional



FC adapter



SC adapter



ST adapter



FC male to LC female adapter



AC/DC adapter



NEXT-Generation
Network Measurement

FTTx
Test Solutions



ISO9001



ISO14001:2015

SPECIFICATIONS


Model	BOU350T	BOU350C
Display Range	1310/1490/1550/1625: +10 ~ -70dBm 850/1300: +10 ~ -60dBm	1310/1490/1550/1625: +26 ~ -50dBm 850/1300: +26 ~ -40dBm
Accuracy *	± 0.2 dB	
Calibrated Wavelengths	850nm / 1300nm / 1310nm / 1490nm / 1550nm / 1625nm	
Resolution	0.01dB	
OPM Connector	FC & 2.5mmUPP (option: SC, ST)	
Build in VFL(Optional)	1mW or 10mW or customize	
REF	Yes	
Auto Power Off	No operation in 10 minutes (can be canceled), Low battery energy	
Battery Charge	Yes	
Battery Life	Above 100 hours	
Power Supply	AA *2 batteries or AC/DC power supply adapter	

* at 20±3°C, CW, with FC connector, -10dBm

GENERAL SPECIFICATIONS

Size(H*W*D)	160mm * 75mm * 32mm
Weight	About 180g
Storage Temperature	-20 -- +60 °C, < 90%RH
Operating Temperature	-10 -- +50 °C, < 90%RH

ORDERING INFORMATION

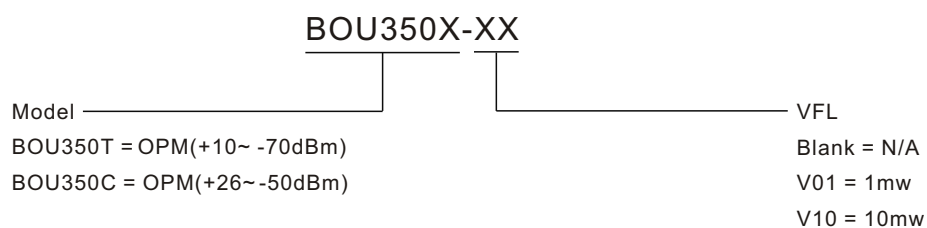

Example: BOU350T, BOU350C-V01